VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A
INTERNET ADDRESS: www.vimco.biz

Model '**BB**' (w/o base plate)

Model '**BE**' (with base plate)



Model '**BH**' (w/o height adjustment or anchoring option)

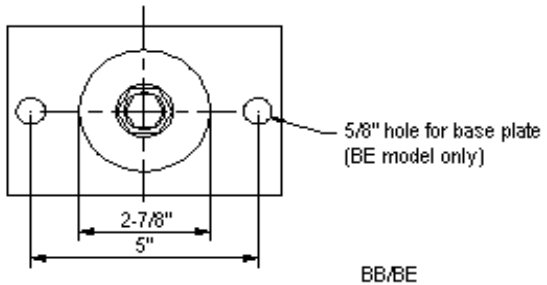

BB/BE

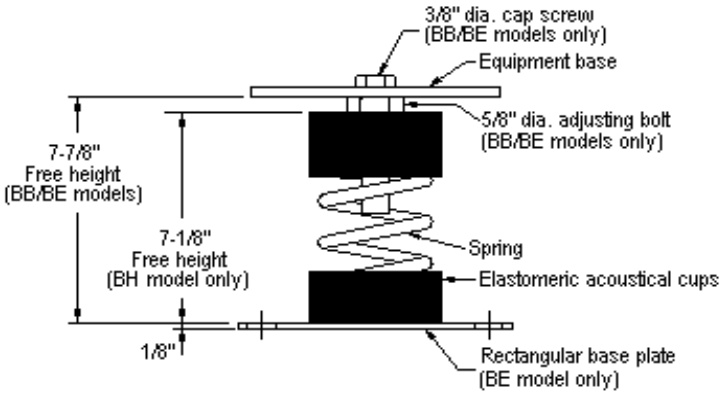

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
Bx-181	86	130
Bx-182	133	200
Bx-183	180	270
Bx-184	266	400
Bx-185	486	730
Bx-186	713	1070
Bx-187	926	1390
Bx-181-199	593	890
Bx-182-199	633	950
Bx-183-199	683	1025
Bx-184-199	783	1175
Bx-185-199	933	1400
Bx-186-199	1233	1850
Bx-187-199	1460	2190

× Choose appropriate isolator model: BB,BE,BH using mounting style diagrams on left.

FEATURES

* Large diameter laterally stable springs
* Weld-free construction
* Anti-skid elastomeric acoustical cup
* Built-in leveling device
* High deflection, low natural frequency
* Spring elements color-coded for easy field verification

NOTES

1. Isolators have a min. operating Kx/Ky ratio of 1.0
2. Springs have 50% additional travel to solid beyond rated load.
3. Isolators should be selected in the range of -30% to +25 % of rated load.
4. Consult spring chart for isolator performance data.

Notes / Remarks :			Title :	Drawing no.
	Project :		**BB / BE / BH** Free-standing Spring Mount Rubber Cup Construction (3" deflection)	**S-2025.21**
	Client :			
	Consultant :			
	Representative :			Rev. **2**