


# VIBRATION MANAGEMENT CORPORATION

3532-A EAST TC JESTER , BROOKWOOD BUSINESS PARK , HOUSTON , TEXAS 77018 , U.S.A

INTERNET ADDRESS: [www.vimco.biz](http://www.vimco.biz)

MODEL	PIPE SIZE (inches)	HANGER ROD DIAMETER (mm)	MAXIMUM LOAD (lbs)
PSx-2	1/4	8	500
PSx-5	3/8, 1/2	8	500
PSx-7	3/4	8	500
PSx-10	1	8	500
PSx-12	1 1/4	8	500
PSx-15	1 1/2	8	500
PSx-20	2	8	500
PSx-25	2 1/2	10	800
PSx-30	3	10	800
PSx-40	4	10	800
PSx-50	5	10	800
PSx-60	6	10	800
PSx-80	8	12	1200
PSx-100	10	12	1200

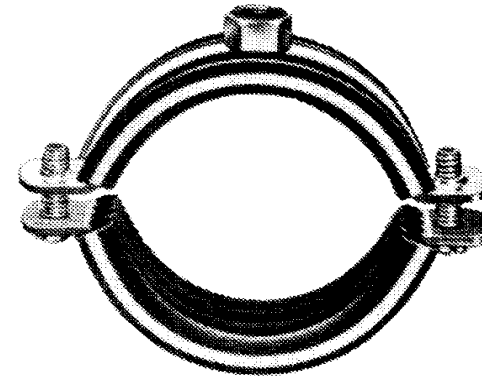

PSL Model shown above

### MATERIALS

Item	Description
Clamp	Galvanised steel
Lining (on PSL model only)	Synthetic rubber

### FEATURES

- \* Simple, quick installation.
- \* Rubber lining on PSL models absorbs sound and vibration and acts as a thermal barrier.

### NOTES

1. Choose appropriate model as per requirement:  
PSP - Plain , PSL - With rubber lining
2. Pipe size indicated above is for mild steel pipes. Contact factory for copper tube sizing.

### APPLICATION

- \* Suspension of non-insulated pipes.

Notes / Remarks :

Project :  
Client :  
Consultant :  
Representative :

Title :

**PSP / PSL**  
Extension Split Ring Hanger

Drawing no.  
**S-2730.21**

Rev. 0