VIBRATION MANAGEMENT CORPORATION

3532-A EAST TC JESTER, BROOKWOOD BUSINESS PARK, HOUSTON, TEXAS 77018, U.S.A

INTERNET ADDRESS: www.vimco.biz

Hole diameters sized to accomodate 3/32" to 1/4" cable without the need for a thimble

MODEL	DOD / DOL T	OADI E	B 4 6 3 / IB 41 IB 4
MODEL	ROD / BOLT CABLE		MAXIMUM
	SIZE	DIA.	DESIGN LOAD
	(inches)	(inches)	(lbs)
SCRSA-00-xx	1/4" - 1 1/4"	3/32	600
SCRSA-01-xx	1/4" - 1 1/4"	1/8	1100
SCRSA-02-xx	1/4" - 1 1/4"	3/16	2667
SCRSA-03-xx	1/4" - 1 1/4"	1/4	4400

ROD/ BOLT CODES		
CODE	SIZE	
	(inches)	
02	1/4"	
04	3/8"	
05	1/2"	
06	5/8"	
07	3/4"	
08	7/8"	
10	1"	
12	1 1/4"	



NOTES

- 1. While ordering specify rod/bolt size code in place of "xx" e.g. for 1/8" cable with 3/8" bolt order SCRSA-01-04
- 2. Maximum load rating based on cable breaking strength.
- 3. Each SCRSA assembly is supplied with 1 or 2 oval sleeves (depending on application)
- 4. For best results use VIMCO model SCCT crimping tools.
- 5. Also available in retrofit models. Contact factory for information.

APPLICATION

* For permanent attachment of cable brace to structure / equipment. Design for use with 7x19 strand core pre-stretched galvanized aircraft cable.

FEATURES

- * Complies with ASCE 19 and SMACNA Restraint Manual as required by FEMA, NEHRP, IBC, OSHPD, UNC, BOCA, SBCCI, other Building Codes
- * Permanent end fitting


Hole diameter

according to

bolt size

- * Maintains break strength of cable and does not require thimbles
- * (2) SCRSA's can be stacked on single rod to make a 4-way brace
- * Simple installation

TYPICAL CONNECTION DETAILS

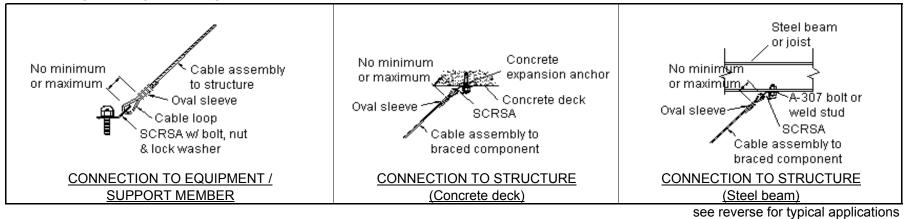

Notes / Remarks :

Project
Client
Consultant
Representative

Project
Title : SCRSA
Seismic Cable Restraint
System
S-3100.32
Rev. 1

VIBRATION MANAGEMENT CORPORATION

3532-A EAST TC JESTER, BROOKWOOD BUSINESS PARK, HOUSTON, TEXAS 77018, U.S.A.

INTERNET ADDRESS: www.vimco.biz

TYPICAL APPLICATIONS

